



**Calhoun: The NPS Institutional Archive**  
**DSpace Repository**

---

Theses and Dissertations

1. Thesis and Dissertation Collection, all items

---

1995-09

# The local motion planning for an autonomous mobile robot

Yun, Seok Jun

Monterey, California. Naval Postgraduate School

---

<http://hdl.handle.net/10945/35223>

---

This publication is a work of the U.S. Government as defined in Title 17, United States Code, Section 101. Copyright protection is not available for this work in the United States.

*Downloaded from NPS Archive: Calhoun*



<http://www.nps.edu/library>

Calhoun is the Naval Postgraduate School's public access digital repository for research materials and institutional publications created by the NPS community. Calhoun is named for Professor of Mathematics Guy K. Calhoun, NPS's first appointed -- and published -- scholarly author.

**Dudley Knox Library / Naval Postgraduate School**  
**411 Dyer Road / 1 University Circle**  
**Monterey, California USA 93943**

# NAVAL POSTGRADUATE SCHOOL

## Monterey, California



## THESIS

### THE LOCAL MOTION PLANNING FOR AN AUTONOMOUS MOBILE ROBOT

by

Seok Jun Yun

September 1995

Thesis Advisor:

Yutaka Kanayama

Approved for public release; distribution is unlimited.

DTIC QUALITY INSPECTED 1

19960220 036

**REPORT DOCUMENTATION PAGE**Form Approved  
OMB No. 0704-0188

Public reporting burden for this collection of information is estimated to average 1 hour per response, including the time reviewing instructions, searching existing data sources gathering and maintaining the data needed, and completing and reviewing the collection of information. Send comments regarding this burden estimate or any other aspect of this collection of information, including suggestions for reducing this burden to Washington Headquarters Services, Directorate for Information Operations and Reports, 1215 Jefferson Davis Highway, Suite 1204, Arlington, VA 22202-4302, and to the Office of Management and Budget, Paperwork Reduction Project (0704-0188), Washington, DC 20503.

1. AGENCY USE ONLY (Leave Blank)		2. REPORT DATE September 1995		3. REPORT TYPE AND DATES COVERED Master's Thesis	
4. TITLE AND SUBTITLE THE LOCAL MOTION PLANNING FOR AN AUTONOMOUS MOBILE ROBOT				5. FUNDING NUMBERS	
6. AUTHOR(S) Yun, Seok Jun					
7. PERFORMING ORGANIZATION NAME(S) AND ADDRESS(ES) Naval Postgraduate School Monterey, CA 93943-5000				8. PERFORMING ORGANIZATION REPORT NUMBER	
9. SPONSORING/ MONITORING AGENCY NAME(S) AND ADDRESS(ES)				10. SPONSORING/ MONITORING AGENCY REPORT NUMBER	
11. SUPPLEMENTARY NOTES The views expressed in this thesis are those of the author and do not reflect the official policy or position of the Department of Defense or the United States Government.					
12a. DISTRIBUTION / AVAILABILITY STATEMENT Approved for public release; distribution is unlimited.				12b. DISTRIBUTION CODE	
13. ABSTRACT (Maximum 200 words) The major problem addressed by this research is how to develop a motion control algorithm for local motion planning of an autonomous mobile robot. The approach taken was to clearly define the robot's motion descriptions and to design a high-level, machine independent robot control language called MML (Model-based Mobile robot Language). The results are that the robot can implement smooth rotation, symmetric, and initial motion tracking on an given environment. Based on the motion control algorithm developed in this thesis, the robot with rigid body can be applicable in both local and global motion planning. The experimental results were successful. The algorithms were implemented first on a simulator, then on the autonomous mobile robot <i>Yamabico-11</i> . Given an initial and final configuration, the vehicle demonstrated the capability to safely achieve its goal.					
14. SUBJECT TERMS Robotics, autonomous mobile robots, Motion Control				15. NUMBER OF PAGES 74	
				16. PRICE CODE	
17. SECURITY CLASSIFICATION OF REPORT Unclassified		18. SECURITY CLASSIFICATION OF THIS PAGE Unclassified		19. SECURITY CLASSIFICATION OF ABSTRACT Unclassified	
				20. LIMITATION OF ABSTRACT UL	



Approved for public release; distribution is unlimited

**THE LOCAL MOTION PLANNING FOR  
AN AUTONOMOUS MOBILE ROBOT**

Seok Jun Yun  
Captain, ROKArmy  
B.S., Korea Military Academy, 1988

Submitted in partial fulfillment of the  
requirements for the degree of

**MASTER OF SCIENCE IN COMPUTER SCIENCE**

from the


**NAVAL POSTGRADUATE SCHOOL**


September 1995


Author:

  
Seok Jun Yun

Approved by:

  
Yutaka Kanayama, Thesis Advisor

  
Xiaoping Yun, Second Reader

  
Ted Lewis, Chairman,  
Department of Computer Science



## ABSTRACT

The major problem addressed by this research is how to develop a motion control algorithm for local motion planning of an autonomous mobile robot.

The approach taken was to clearly define the robot's motion descriptions and to design a high-level, machine independent robot control language called MML (Model-based Mobile robot Language).

The results are that the robot can implement smooth rotation, symmetric, and initial motion tracking on an given environment. Based on the motion control algorithm developed in this thesis, the robot with rigid body can be applicable in both local and global motion planning.

The experimental results were successful. The algorithms were implemented first on a simulator, then on the autonomous mobile robot *Yamabico-II*. Given an initial and final configuration, the vehicle demonstrated the capability to safely achieve its goal.





# TABLE OF CONTENTS

I.	INTRODUCTION .....	1
II.	BACK GROUND .....	3
III.	PROBLEM STATEMENTS .....	5
IV.	SMOOTH ROTATION .....	7
A.	MOTION DESCRIPTION .....	7
B.	MOTION PLANNING .....	8
1.	Algorithm For Smooth Rotation .....	8
2.	Motion Planning With Algorithm .....	8
C.	EXPERIMENTAL RESULT .....	10
V.	SYMMETRIC MOTION PLANNING .....	11
A.	MOTION DESCRIPTION .....	11
B.	MOTION PLANNING WITH THE STEERING FUNCTION .....	11
1.	Line Tracking .....	11
2.	Symmetric Motion.....	12
a.	Virtual Vehicle Simulation .....	12
b.	Real Vehicle Moving while Simulation .....	14
c.	Local Coordinate .....	15
d.	Real Vehicle Tracking .....	16
C.	EXPERIMENTAL RESULT .....	17
VI.	INITIAL MOTION PLANNING .....	21
A.	MOTION DESCRIPTION .....	21
B.	MOTION PLANNING WITH THE STEERING FUNCTION .....	22
1.	Motion Planning to Avoid The Collision.....	23
2.	Motion Planning to Converge to The Reference Line .....	24
3.	Motion Planning to Determine The Direction of Path .....	26
4.	Motion Planning to Check Collision.....	27
a.	Inverted World .....	27
b.	View Angle .....	28
c.	Collision Test of Vehicle .....	29
C.	EXPERIMENTAL RESULT .....	31
APPENDIX	.....	33
A.	C PROGRAM FOR SMOOTH ROTATION .....	33
B.	C PROGRAM FOR SYMMETRIC MOTION PLANNING .....	35
C.	C PROGRAM FOR INTIAL MOTION PLANNING.....	44
D.	C LIBRARY FUNCTIONS .....	57
LIST OF REFERENCES	.....	61
INITIAL DISTRIBUTION LIST	.....	63



## LIST OF FIGURES

1.	Rotating of orientation without changing its position .....	7
2.	The graph for smooth rotation algorithm.....	9
3.	The graph for redefined algorithm.....	10
4.	Symmetric motion.....	11
5.	Line Tracking.....	12
6.	Virtual vehicle tracking.....	13
7.	Real vehicle moving .....	14
8.	Local coordinate.....	15
9.	The result with the same $\sigma$ as the virtual vehicle does .....	17
10.	The result with a half of virtual vehicle $\sigma$ .....	18
11.	The result with a quarter of virtual vehicle $\sigma$ .....	19
12.	The case where simulated path collides.....	21
13.	The case to avoid collision.....	23
14.	The case to converge to the reference line.....	25
15.	The case of various direction of paths .....	26
16.	Inverted world.....	28
17.	View angle at point $p$ .....	28
18.	Collision test of vehicle .....	29
19.	The result the vehicle finds a path .....	31

## I. INTRODUCTION

One of the ultimate goals in robotics is to develop an autonomous robot - being capable of successfully completing a task given what to do and how to do it. Increasingly capable autonomous robot platforms are being developed to handle a myriad of hazardous duty assignments. While manufacturing dominates the area of robotic applications, useful advances have been made in the areas of waste management, space exploration, undersea work, assistance for the disabled and medical surgery [Lato]. Several government-sponsored efforts are underway for building systems for military applications such as fighting fires, handling ammunition, transporting material, conducting underwater search and inspection operations, and other dangerous tasks now performed by humans [Nava].

Many of the above tasks require motion of the robot in order to carry out any task. This problem is known as the motion planning problem. We divide the motion planning problem into two sub-problems: the global and local motion planning. The robot motion can be described as follows: a path of robot to carry out a task while moving from one configuration  $(p, \theta, k)$  to another. In motion planning, not only is its position important, but the orientation and curvature of the robot are important as it follows the path.

The purpose of the research is to investigate fundamental theories for navigation to construct autonomous mobile robot for military and industrial applications. In this thesis, we will discuss several local motion planning problems inevitable for the robot to carry out any task. They are divided as follows: smooth rotation, symmetric, and initial motion planning.



## II. BACK GROUND

The focus of this thesis is on planning the motion of an autonomous mobile robot. The algorithms for motion planning to be taken by real robot are developed. Many simulations are done to verify the algorithms.

A high-level motion specification language, Mobile-based Mobile-robot Language (MML-11), suitable to describe the solutions to the motion planning problem is used as the implementation and verification of the algorithms.

The world space  $\mathcal{W}$  for the motion planning problem in this thesis is a two dimensional plane  $\mathbb{R}^2$  on which a global Cartesian coordinate system is defined. The obstacles are closed subsets of  $\mathcal{W}$ . The free space,  $FREE(\mathcal{W})$ , is the complement of the union of all obstacles in the world space  $\mathcal{W}$ .

The vehicle in the thesis refers to a rigid body robot which has fixed shape - during the research we will use *Yamabico-II* for experiments although the algorithms will be suitable for robots with any variable shape.

A configuration  $q$  in this thesis defined as a combination of position, orientation, and curvature,  $(p, \theta, k)$ , where  $p$  indicates the position  $(x, y)$  in the global Cartesian coordinate system,  $\theta$  is the orientation related to the x-axis of the global coordinate system [Loza], and  $k$  is the specified curvature. The configuration defined in this thesis is normally used to describe the robot's instantaneous status, either it is stationary or moving. This configuration is specially useful to specify a path. For instance, if we use  $q = ((x, y), \theta, k)$  to specify a line, this line passes through the point at  $(x, y)$  and with orientation  $\theta$ . When the curvature element  $k = 0$ , it is specifying a straight line, otherwise it's a circle.

The motion of a vehicle is subject to nonholonomic and kinematic constraints, that is, the vehicle is able to perform both forward and backward motion but not sideways motion. The robot's orientation and curvature at the path are continuous.

### III. PROBLEM STATEMENTS

The problem investigated in this thesis is intelligent behavior of autonomous mobile robots with emphasis on local motion planning and how to precisely and stably control the motions of the autonomous mobile robot *Yamabico-II*. This problem is subdivided into the following problems:

1. What procedures should an autonomous mobile robot follow in order to rotate smoothly in a given environment?
2. What procedures should an autonomous mobile robot follow to get to the configuration of not being on the center of the path?
3. What procedures should an autonomous mobile robot follow to avoid the collision of the walls and to get to the goal configuration?






## IV. SMOOTH ROTATION

### A. MOTION DESCRIPTION

We consider a situation where the vehicle at an arbitrary configuration  $q_s = (p_s, \theta_s, k_s)$  is supposed to rotate its orientation from  $\theta_s$  to an arbitrary  $\theta_g$  without changing its position  $p_s$ . (Figure 1)

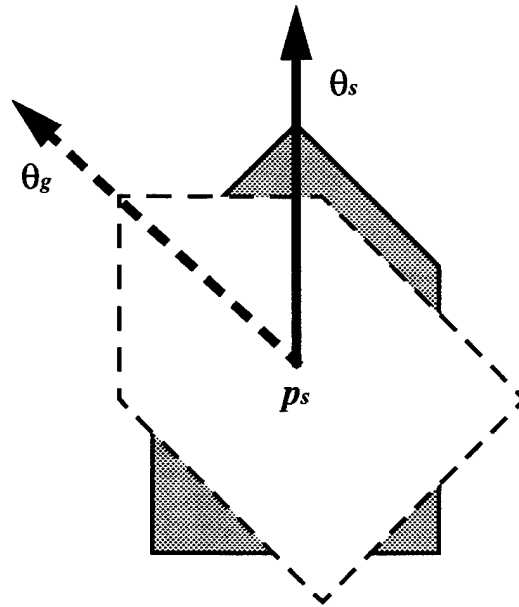

**Figure 1: Rotating of orientation without changing its position**

The motion of this vehicle can be described as follows:

Start rotating the orientation towards the desired direction.

Check the vehicle heading.

Stop rotating when its heading equals to the goal orientation.

As we can see, the motion does not involve any translation of the vehicle. So it is not nec-

essary to use the steering function. Instead, the motion is based on relation between difference of angles and rotational speed of the vehicle. We need an algorithm which controls the rotational speed of the vehicle depending on the vehicle's rotational angle.

## **B. MOTION PLANNING**

### **1. Algorithm For Smooth Rotation**

The algorithm as Eq 4.1 is a tool for a mobile robot vehicle performing smooth rotation.

$$\frac{dw}{dt} = -2kw - k^2(\theta_s - \theta_g) \quad (\text{Eq 4.1})$$

where  $\frac{dw}{dt}$ : Vehicle's rotational acceleration,

$w$ : Vehicle's rotational speed,

$\theta_s$ : Vehicle's initial orientation,


$\theta_g$ : Vehicle's goal orientation,

$k$ : Positive constant

As we can see in Eq 4.1, the rotational speed is the only control variable of the algorithm. While rotating, the algorithm returns rotational acceleration depending on the current speed at each time, and hence, the speed of the vehicle also.

### **2. Motion Planning With Algorithm**

In Eq 4.1, the positive constant  $k$  is an important factor of the algorithm. The bigger  $k$  we use, the rotational time is shorter, and the smaller  $k$ , it takes more time to rotate. Figure 2 shows the relation between speed and time for the vehicle to rotate  $\pi$  degrees with various  $k$ .

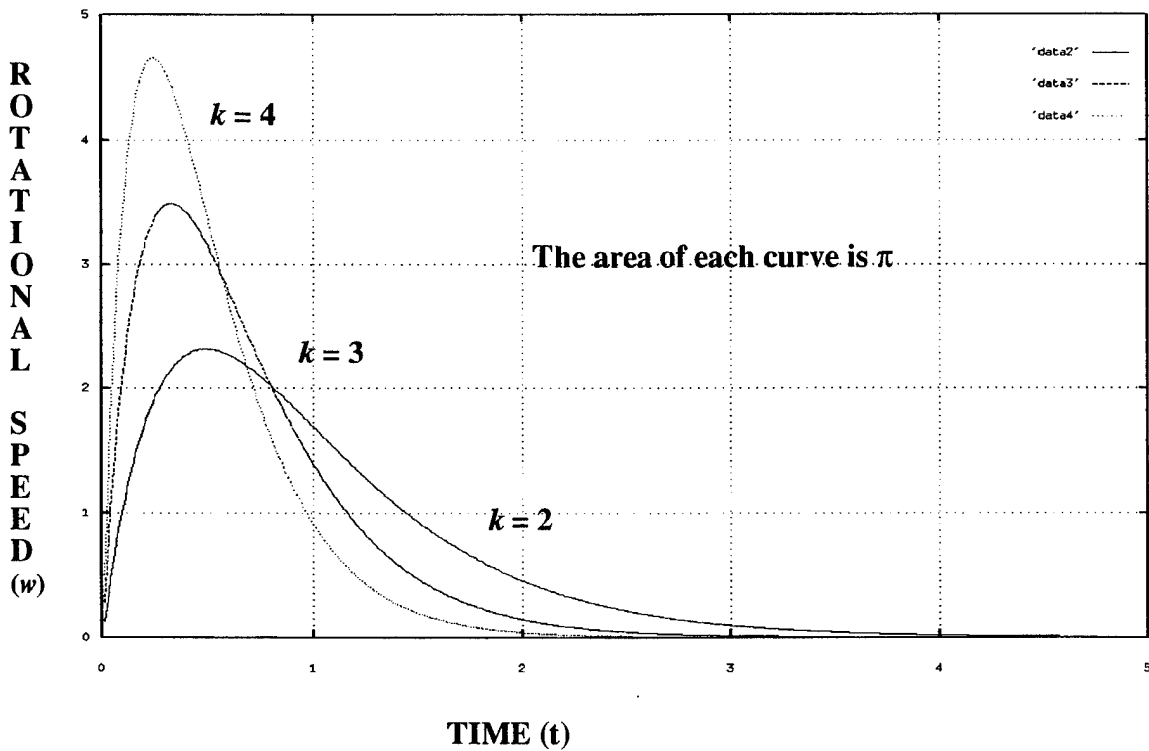


**Figure 2: The graph for smooth rotation algorithm**

As shown in the figure 2, using bigger  $k$ , for example,  $k = 4$  in the graph, gives the vehicle higher speed and shorter time to complete its mission. But in some cases, it can be dangerous for the vehicle if the speed exceeds the vehicle's speed limit. There can be no such high speed in using smaller  $k$ , but it has two defects: one being too much time to do its job, and the other being the lower speed duration time is too long.

### C. EXPERIMENTAL RESULT

Considering rotational time, we used  $k = 4$  curve, but for the safety of the vehicle, we limit the speed with  $w = 3$ . Figure 3 shows the result.

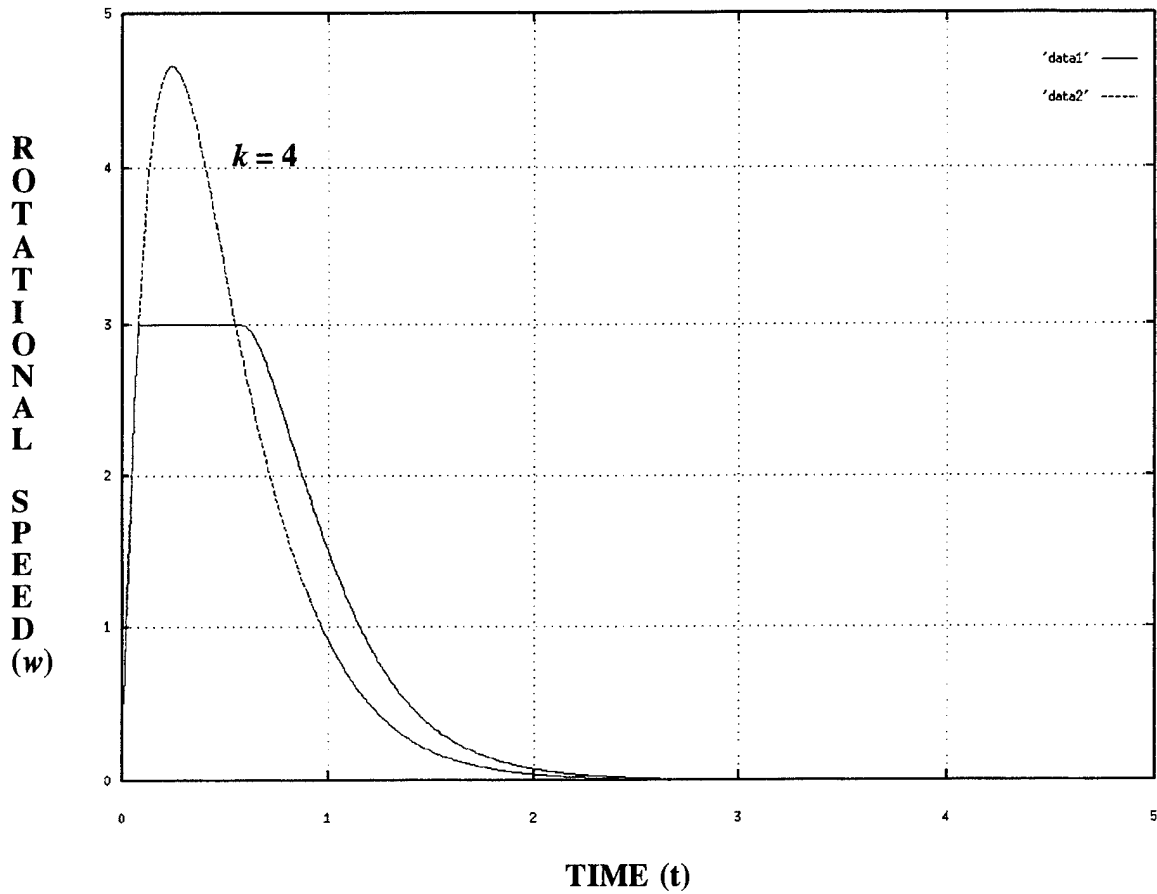

**Figure 3: The graph for redefined algorithm**

As shown by the result, applying the speed limit makes the algorithm more useful.

## V. SYMMETRIC MOTION PLANNING

### A. MOTION DESCRIPTION

We consider a situation where the vehicle is supposed to track a path, and to get to the goal position which may not be on the center of the path. A vehicle is represented by a point  $p_s = (x_s, y_s)$ , its orientation  $\alpha_s$ , and curvature  $k_s$ , and the goal position is represented by  $p_g = (x_g, y_g)$ , and its orientation  $\alpha_g$ , and its curvature  $k_g$ . Figure 4 shows the situation.

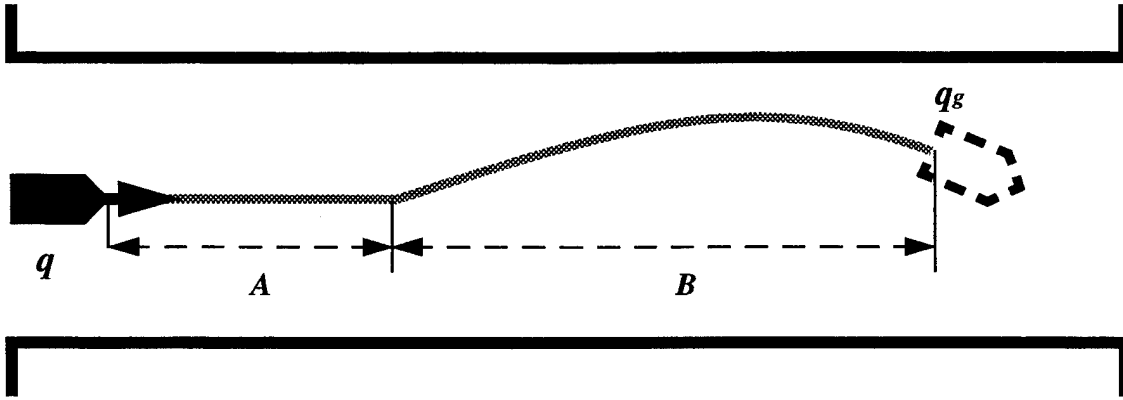


Figure 4: Symmetric motion


The motion of this vehicle can be divided into two parts; one being the motion on the path  $A$ , and the other being the motion on the curve  $B$ . The first part of the motion is easily done by the steering function, but the motion on the curve  $B$  is difficult to make it using the transformation. For the safety of vehicle, it is important to keep moving on the center of path as long as possible.

### B. MOTION PLANNING WITH STEERING FUNCTION

#### 1. Line Tracking

Let's assume a directed straight line  $L$  represented by a point  $(a, b)$  on it, and its orienta-

tion  $\alpha$ . A vehicle away from the line is supposed to track the line. The vehicle is represented by  $p = (x, y)$ , and its orientation  $\theta$ . (Figure 5)

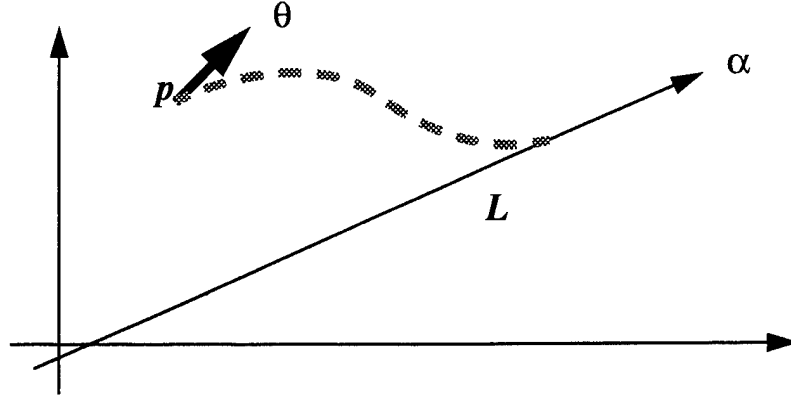

**Figure 5: Line tracking**

The steering function for the vehicle supposed to track the line  $L$  is [Kana]

$$\frac{dk}{ds} = -(ak + b(\theta - \alpha) + c(-(x - a)\sin\alpha + (y - b)\cos\alpha)) \quad (\text{Eq 5.1})$$

Using this steering function, a vehicle tracks a dotted line as shown in Fig. 5.2. How the steering function accomplishes a line tracking is fully described in [Kana], [Macp], and [Kova].

## 2. Symmetric Motion

As seen in Section A in this Chapter, the motion  $B$  is a reverse action of line tracking.

Let's assume a virtual vehicle which tracks a line from goal position. There will be a path kept by the virtual vehicle. With the path in the reverse direction, the real vehicle can move toward the goal position.

### a. Virtual Vehicle Simulation


We let

Start Configuration:  $q_s = ((x_s, y_s), q_s, k_s)$ ,

Goal Configuration:  $q_g = ((x_g, y_g), q_g, k_g)$

Let's assume there is a virtual vehicle at the goal position with reverse direction.

The virtual vehicle is supposed to track a directed straight line  $L$  represented by the start configuration  $q_s$ .

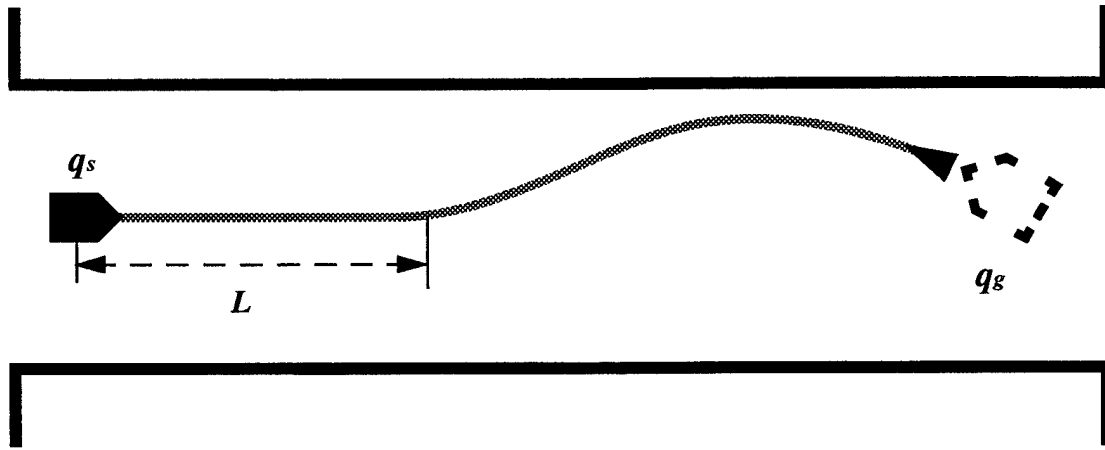

**Figure 6: Virtual vehicle tracking**

We can get

$$k_d = -k_s,$$

$$\theta_d = \theta_s + \pi,$$

$$\Delta d = -(x - x_s)\sin\theta_d + (y - y_s)\cos\theta_d,$$

because the virtual vehicle uses the  $q_s$  as its goal configuration.

The virtual vehicle steering function is

$$\frac{dk}{ds} = -(ak + b(\theta - \theta_d) + c(-(x - x_s)\sin\theta_d + (y - y_s)\cos\theta_d)) \quad (\text{Eq 5.2})$$


Using this steering function, the virtual vehicle tracks the line  $L$ , and finally gets to



the start configuration. Configurations generated during the virtual vehicle move are stored in array to be used by real vehicle later. When storing configurations,  $\theta$  is changed to  $\theta + \pi$ , and kappa is changed its sign(+/-).

***b. Real Vehicle Moving while Simulation***

While the virtual vehicle simulates a line tracking, the real vehicle moves forward also. There will be some point between start configuration  $q_s$  and goal configuration  $q_g$  where the real vehicle meets the virtual one. The point has an important role in symmetric motion planning, because the virtual vehicle finishes its line tracking simulation, and the real vehicle starts tracking a simulated path at the point. We need to know how to get the point.

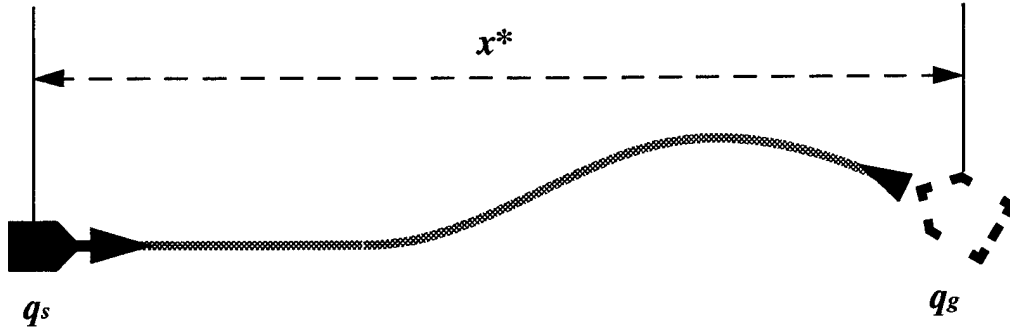

**Figure 7: Real vehicle moving**

As shown in Figure 7, we can get the distance between the real vehicle and the virtual one by computing the local coordinate  $x^*$  - detailed explanation for the local coordinate will be discussed in later subsection. When the distance equals to 0, it is the time the real vehicle starts tracking a simulated path generated by virtual vehicle.

**c. Local Coordinate**

We take simulated configurations by the virtual vehicle sparser than those generated by the real vehicle. In addition to the data, the real vehicle uses the steering function locally between the configurations.


Let's assume

Vehicle configuration:  $q = ((x, y), \theta, k)$ ,

Target configuration:  $q_c = ((x_c, y_c), \theta_c, k_c)$

To use the steering function, we need to compute a local coordinate  $q^* = ((x^*, y^*), \theta^*, k^*)$

between vehicle and target configuration. (Figure 8)

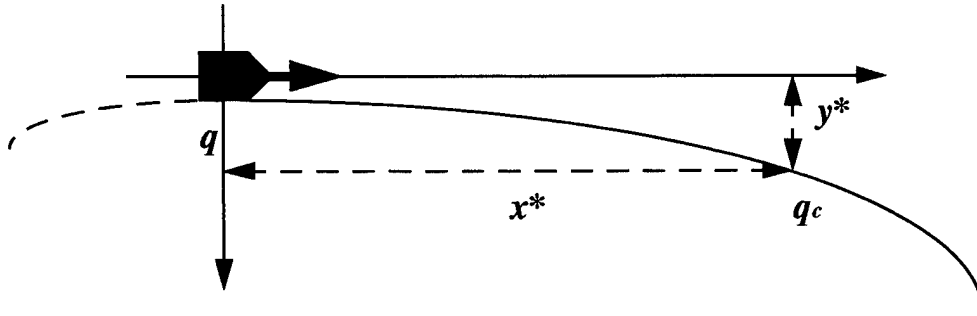

**Figure 8: Local coordinate**

The step how to compute local coordinate  $q^*$  is as follows:

$$q_c = q \circ q^*,$$

$$q' \circ q_c = (q' \circ q) \circ q^*$$

As a result, we get

$$q^* = q' \circ q_c \tag{Eq 5.3}$$

With the Eq 5.3, we can compute local coordinates as follows [Kana95]

$$x^* = (x - x_c)\cos\theta + (y - y_c)\sin\theta \quad (\text{Eq 5.4})$$

$$y^* = (x - x_c)\sin\theta + (y - y_c)\cos\theta \quad (\text{Eq 5.5})$$

**d. Real Vehicle Tracking**

As shown in Fig. 5.4, the real vehicle uses a configuration of the simulated path one by one as its target. The step how to track the simulated path is as follows:

(1) Compute local coordinate between vehicle and target configuration

(2) Check  $x^*$

(2.1) If  $x^* \leq 0$

(2.1.1) If the target is goal configuration

(2.1.1.1) Stop vehicle

(2.1.2) If the target is not goal configuration

(2.1.2.1) Change the target with a new configuration of the simulated path

(2.2) If  $x^* > 0$

(2.3) Move the vehicle using steering function

The real vehicle uses the steering function as follows:

$$\frac{dk}{ds} = -(a\Delta k + b\Delta\theta + c\Delta d) \quad (\text{Eq 5.6})$$


where  $\Delta k = k - k_c$ ,

$\Delta\theta = \theta - \theta_c$ ,

$\Delta d = y^*$


### C. EXPERIMENTAL RESULT

Figure 9 shows the result in which the real vehicle uses the same smoothness as the virtual vehicle does. The vehicle's initial configuration is (0, 0, 0). The vehicle's goal position is (400, 60) and its orientation is 0 degrees. As a result, the real vehicle gets to the configuration (400, 63, 0).

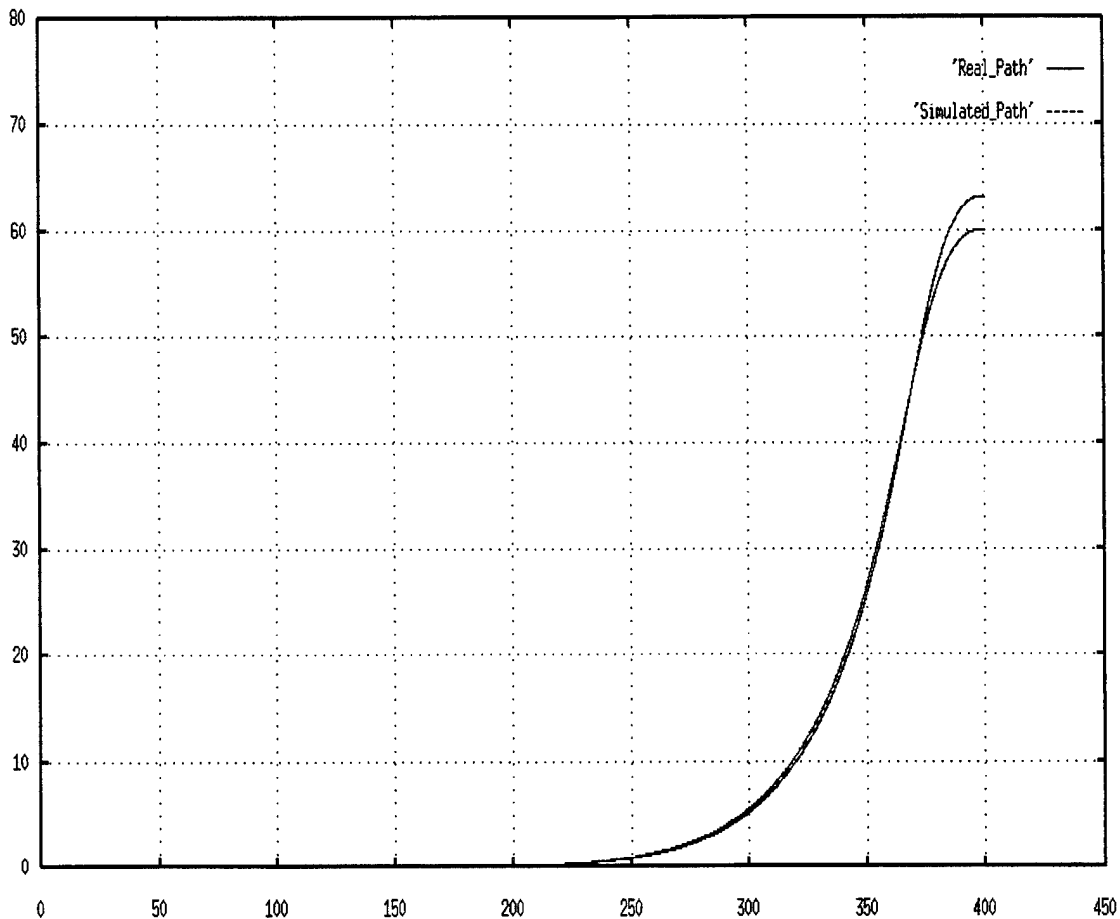


**Figure 9: The result with the same  $\sigma$  as the virtual vehicle does**

Figure 10 shows the result in which the real vehicle uses one half smoothness of the virtual vehicle. The vehicle's initial configuration is (0, 0, 0). The vehicle's goal position is (400, 60) and its orientation is 0 degrees. As a result, the real vehicle gets to the configuration (400, 60.5, 0).

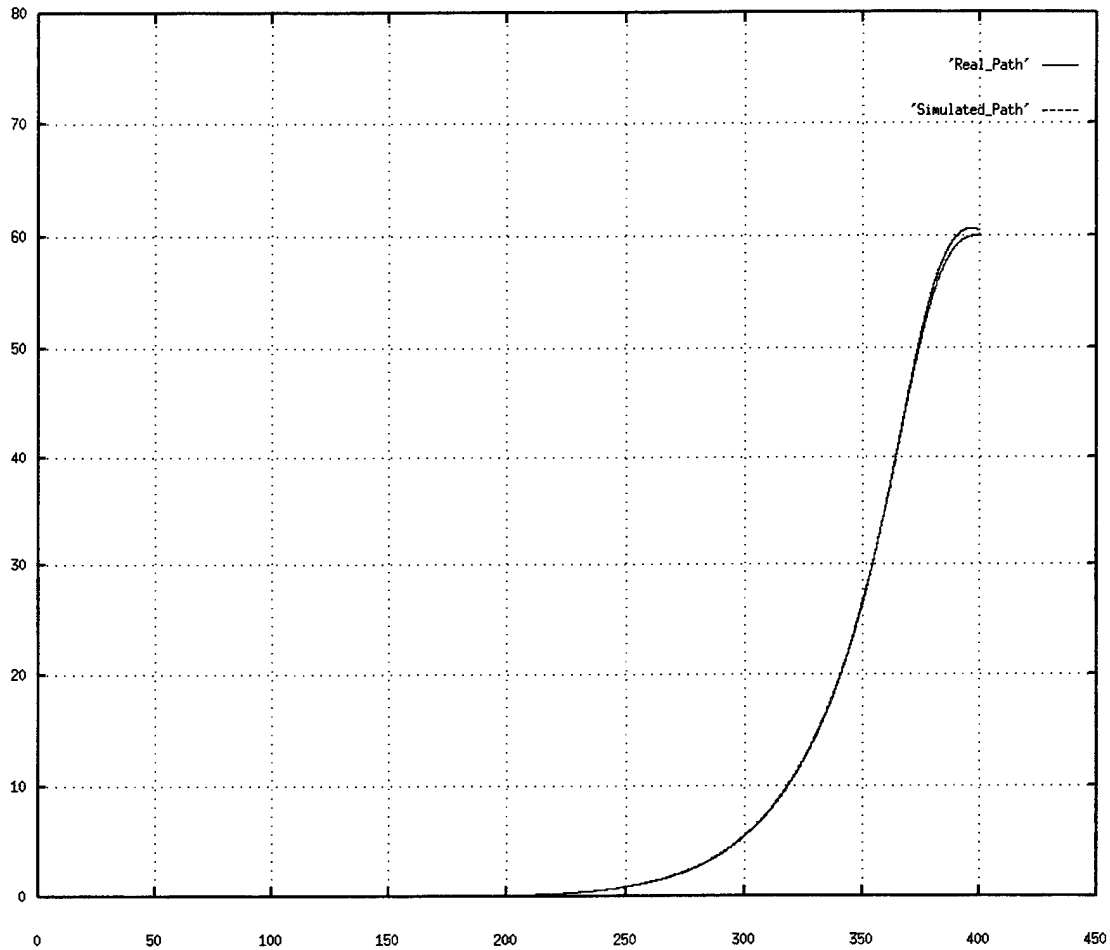

**Figure 10: The result with a half of virtual vehicle  $\sigma$**

Figure 11 shows the result in which the real vehicle uses one quarter smoothness of the virtual vehicle. The vehicle's initial configuration is (0, 0, 0). The vehicle's goal position is (400, 60) and its orientation is 0 degrees. As a result, the real vehicle successfully gets to the configuration (400, 60, 0).

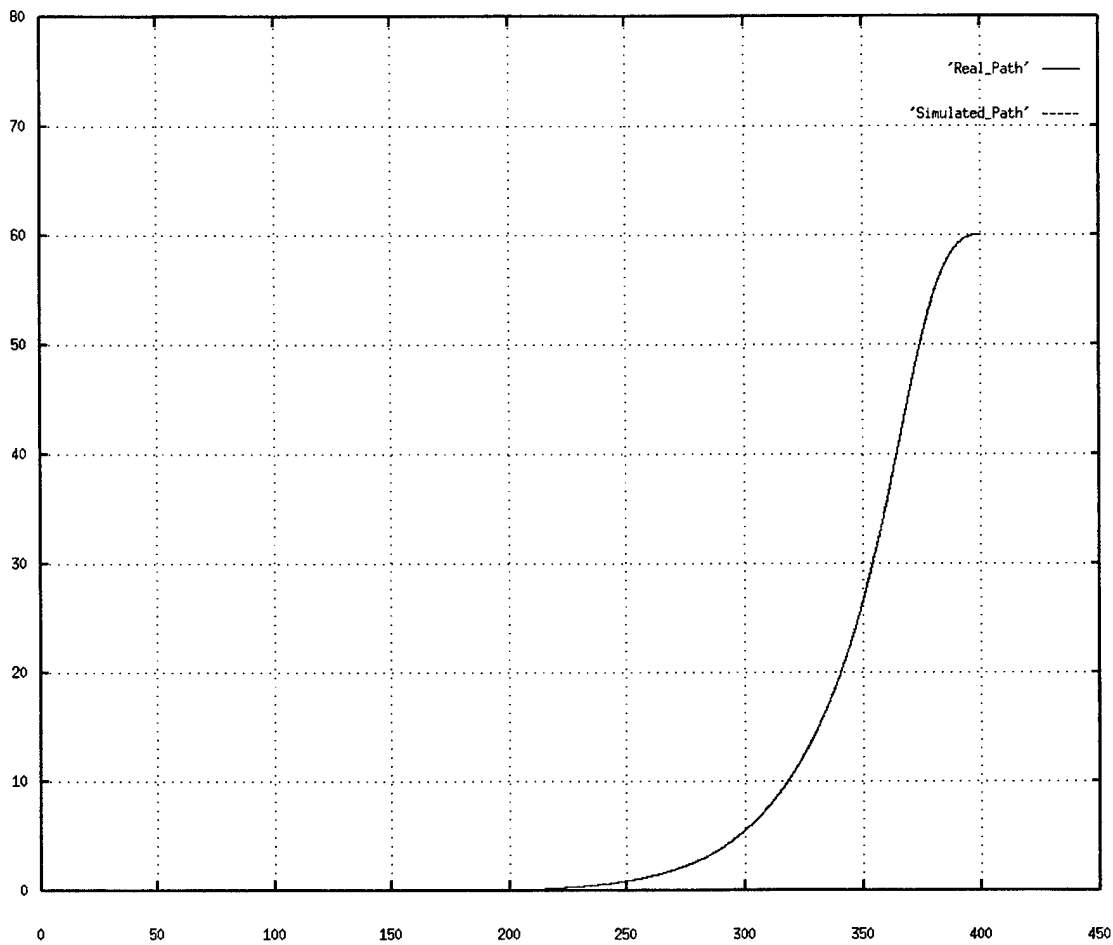

**Figure 11: The result with a quarter of virtual vehicle  $\sigma$**



## VI. INITIAL MOTION PLANNING

### A. MOTION DESCRIPTION

We consider a situation where the vehicle at an arbitrary configuration  $q_s = (p_s, \theta_s, k_s)$  is located on the world which is consisted of walls. There is one border which has a configuration called Exit configuration  $q_e = (p_e, \theta_e, k_e)$ . Figure 12 illustrates this situation.

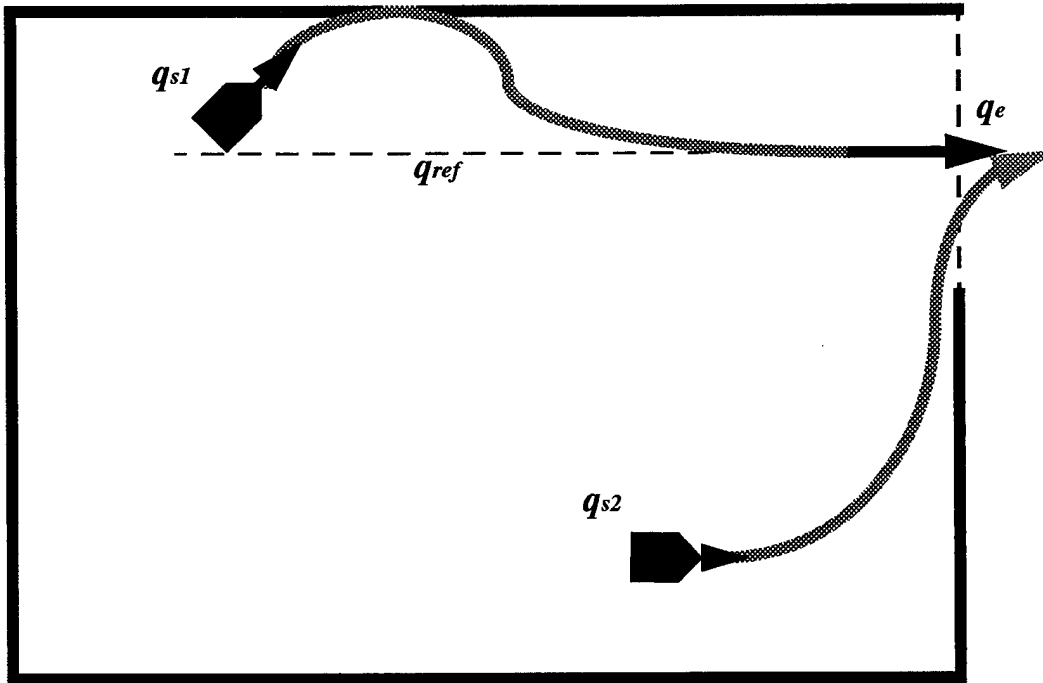


Figure 12: The case where simulated path collides

The world where vehicles are located is a part of k-regions [Kana95][Kova]. A vehicle located in the world has a mission to find a path which can converge to the exit configuration  $q_e$  without colliding the wall. The mission is a kind of line tracking, that is, the vehicle with a configuration  $q_s$  is supposed to track a straight line  $q_{ref}$  represented by  $p_e$  and its orientation  $\theta_e$  using



steering function. As shown in the figure, since the vehicle at configuration  $q_{s1}$  is too close to the wall, the vehicle will collide the wall. For the safety of the vehicle, this behavior can not be accepted. The other vehicle at configuration  $q_{s2}$  is far away from the wall, but the vehicle fails to pass the exit configuration  $q_e$ . The exit configuration  $q_e$  is the start configuration of next region. It's important for the vehicle to get to the exact configuration. The mission can be divided into two parts: one being the mission to find a path to avoid colliding of walls, and the other being the mission to find a path to get to the exit configuration  $q_e$ .

## B. MOTION PLANNING WITH STEERING FUNCTION

The steering function (Eq 6.1) is used for a vehicle to perform smooth line tracking.

$$\frac{dk}{ds} = -(A\Delta k + B\Delta\theta + C\Delta d) \quad (\text{Eq 6.1})$$

In Eq 6.1, A, B, and C are positive constants which are related to the smoothness of vehicle's motion [Kana]. They are determined by the smoothness  $\sigma$  as follows:

$$k = 1 / \sigma \quad (\text{Eq 6.2})$$

$$A = 3 * k \quad (\text{Eq 6.3})$$

$$B = 3 * k * k \quad (\text{Eq 6.4})$$

$$C = 3 * k * k * k \quad (\text{Eq 6.5})$$

From the above equations, we know the smoothness  $\sigma$  determines the sharpness of the tracking trajectory. We can see that the smaller the value of smoothness is, the sharper the trajectory will be, and the larger the smoothness is, the longer the vehicle travels [Kana].

While we know tracking trajectory depends on smoothness, it is important to know that a lower limit of smoothness exists in using the steering function to track a line. The lower limit of smoothness is as follows [Chuang]:

$$\sigma = 0.095 * \Delta d_{\text{init}} \quad (\text{Eq 6.6})$$

In Eq 6.6,  $\Delta d_{init}$  is the closest distance from the initial configuration to the reference line. If a smaller smoothness  $\sigma$  than the lower limit is applied, the tracking trajectory never converge to the reference line.

In addition to the lower limit of smoothness, we have to consider there will be undesirable tracking trajectories to converge to the reference line with some arbitrary smoothness. Although they converge to the reference line, the trajectory travels backward. The minimum desirable smoothness for parallel line tracking is as follows [Chuang]:

$$\sigma = 0.18 * \Delta d_{init} \quad (\text{Eq 6.7})$$

### 1. Motion Planning to Avoid The Collision

A line tracking motion starts from a configuration  $q_s = (p_s, \theta_s, k_s)$ . The goal of the line tracking is the line called reference line  $q_{ref}$ , specified by a configuration  $q_e = (p_e, \theta_e, k_e)$ . Since the line is a straight line, it has a constant curvature  $k_e = 0$ . Figure 13 shows the case.

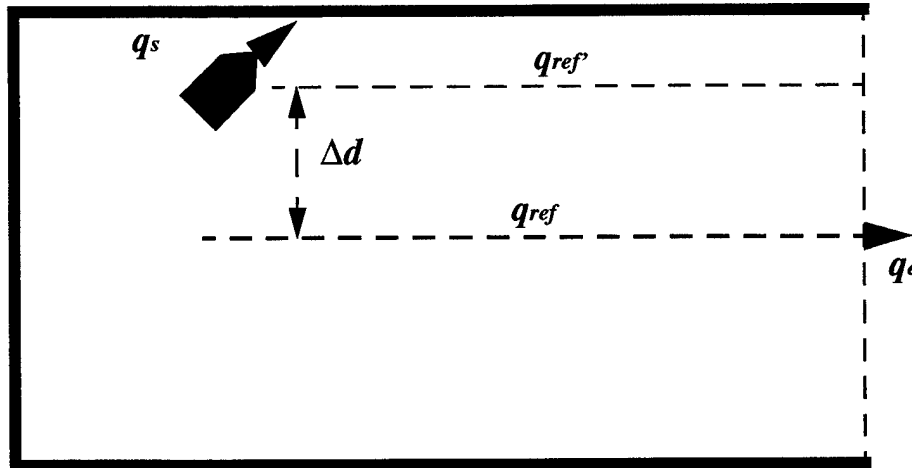


Figure 13: The case to avoid collision

The path of line tracking in the figure refers to a straight line  $q_{ref}$ . But we can make the Eq 6.1 simpler using  $q_{ref}$  as a reference line instead of using  $q_{ref}$ . We can use a bigger smoothness to converge to the reference line, because the  $\Delta d$  is 0.

$$\frac{dk}{ds} = -(A\Delta k + B\Delta\theta) \quad (\text{Eq 6.8})$$

The step to avoid collision is as follows:

(1) Start line tracking simulation with default smoothness

(2) Check if path collides the wall

- Checking collision will be discussed later in this chapter

(2.1) If the path collides the wall

(2.1.1) Change the smoothness to a smaller one

(2.1.1.1) Check if the smoothness is smaller than  $0.095 * \Delta d_{init}$

(2.1.1.1.1) Quit the simulation

(2.1.1.1.2) No path to avoid collision exists

(2.1.2) Start line tracking simulation again with new smoothness

(2.2) If there is no collision on the path


(2.2.1) Check if the path is parallel to the exit configuration  $q_e$

(2.2.2) If the path is parallel to the exit configuration, stop the simulation.

(3) Return the smoothness  $\sigma$

## 2. Motion Planning to Converge to The Reference Line

A line tracking motion starting from a configuration  $q_s = (p_s, \theta_s, k_s)$  reached to a configuration  $q_n = (p_n, \theta_n, k_n)$  which is parallel to the exit configuration  $q_e$ . From the configuration  $q_n = (p_n, \theta_n, k_n)$ , another line tracking motion starts to converge to the reference line  $q_{ref}$  specified by  $q_e = (p_e, \theta_e, k_e)$ . Figure 14 shows this case.

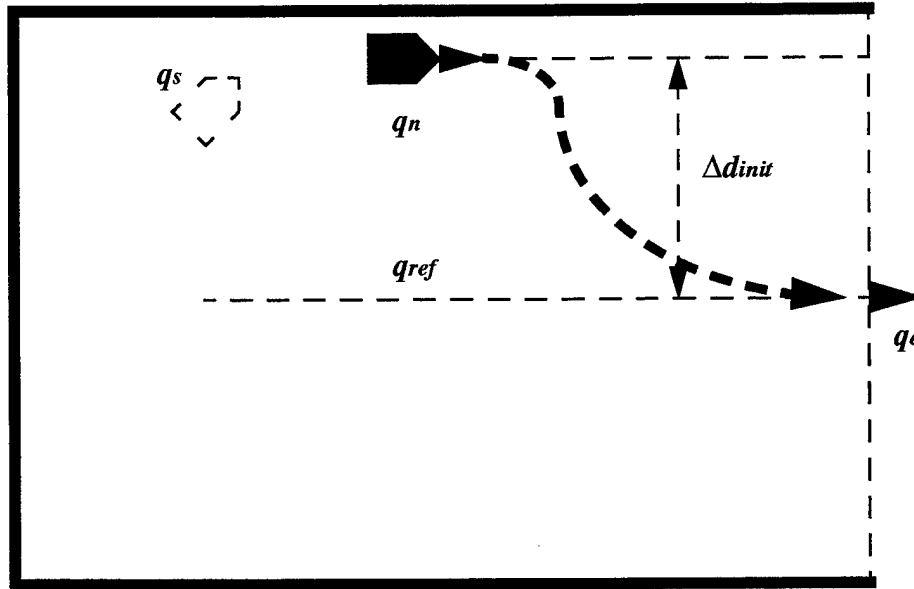

**Figure 14: The case to converge to the reference line**

The path of line tracking in the figure refers to a straight line  $q_{ref}$ . A line tracking starts with default smoothness  $\sigma$  again. The reason not using smoothness which we got in Section 1 is that the simulated path could be sharper to avoid the collision, that is, the smoothness would be smaller than  $0.18 * \Delta d_{init}$ . A line tracking path with the smoothness will be undesirable to converge to the reference line - the detailed explanation is discussed in Section 1 in this Chapter.

The step to converge to the reference line is as follows:

- (1) Start line tracking simulation with default smoothness
- (2) Check if  $x^*$  equals to 0, or smaller than 0
  - (1.1) Check if  $y^*$  equals to 0
    - (1.1.1) Return the smoothness  $\sigma$
    - (1.1.2) Quit the simulation

(1.2) If  $y^*$  does not equal to 0

(1.2.1) Change the smoothness to a smaller one

(1.2.2) Check if the smoothness is smaller than  $0.18 * \Delta d_{init}$


(1.2.2.1) Quit the simulation

(1.2.2.2) No path exists

(3) Start line tracking simulation again with new smoothness

### 3. Motion Planning to Determine The Direction of Path

A line tracking motion starting from a configuration  $q_s = (p_s, \theta_s, k_s)$  will get to the goal configuration  $q_e = (p_e, \theta_e, k_e)$  on one desirable path. But actually, regarding to the heading of the vehicle, there can exist more desirable path. Figure 15 shows this case.

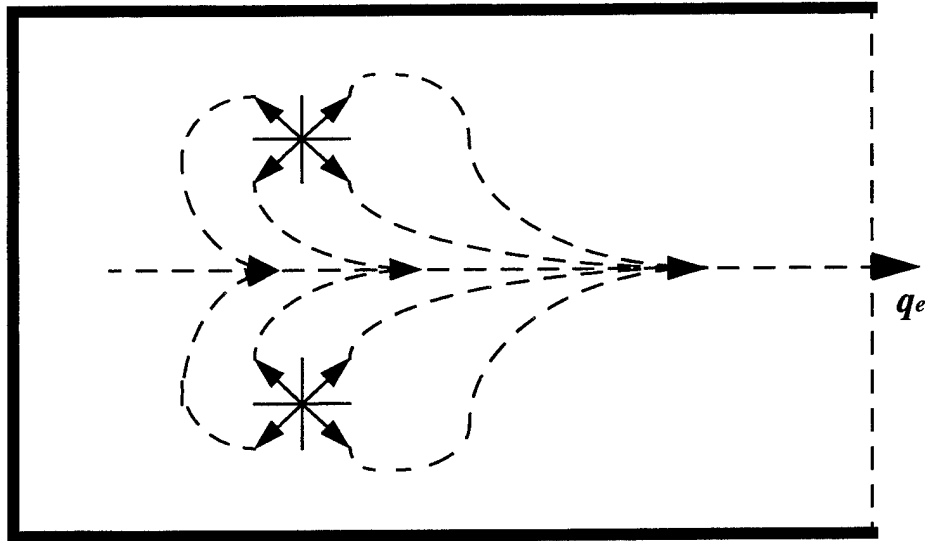

**Figure 15: The case of various direction of paths**

The direction of the path is related not only to the heading of the vehicle  $\theta_s$ , but to the

orientation of the Exit configuration  $\theta_e$ .

The step to determine the direction of the path is as follows:

(A)  $|\Phi(\theta_s - \theta_e)| \leq \pi / 2$

-  $\Phi$  means normalization

(1) If  $((\theta_s - \theta_e) > \pi / 2)$  Then  $\theta = \theta_s - 2\pi$

(2) Else if  $((\theta_s - \theta_e) < -\pi / 2)$  Then  $\theta = \theta_s + 2\pi$

(B)  $|\Phi(\theta_s - \theta_e)| > \pi / 2$

(1)  $y^* \geq 0$

(a) If  $((\theta_s - \theta_e) > 0)$  Then  $\theta = \theta_s - 2\pi$

(b) Else if  $((\theta_s - \theta_e) < -2\pi)$  Then  $\theta = \theta_s - 2\pi$

(2)  $y^* < 0$

(a) If  $((\theta_s - \theta_e) > 2\pi)$  Then  $\theta = \theta_s - 2\pi$


(b) Else if  $((\theta_s - \theta_e) < 0)$  Then  $\theta = \theta_s + 2\pi$

#### 4. Motion Planning to Check Collision

In a motion planning simulation from a configuration  $q_s = (p_s, \theta_s, k_s)$  to find a desirable path to get to the exit configuration  $q_e = (p_e, \theta_e, k_e)$ , it is important to check if the path collides the wall. To test it, we need to know how the world is described.

##### a. *Inverted World*

We consider a two-dimensional world  $W$  with holes. A hole is an obstacle for a vehicle. A free space  $Free(W)$  is the complement of the union of all holes. There might be a hole among them which completely surrounds the free space. The hole like this is said to be inverted. Every free space is a connected subset of  $W$ . Figure 16 shows this world.

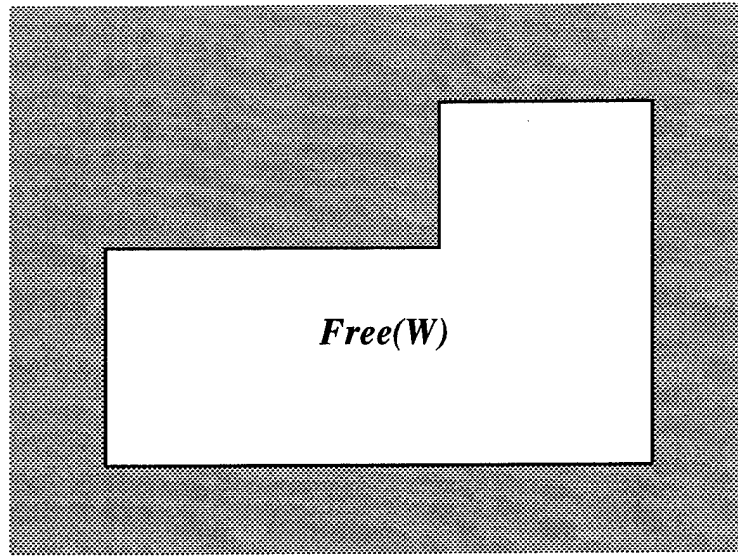


**Figure 16: Inverted World**

**b. View Angle**

With a polygon  $B$  and a point  $p$  which is not on its boundary, the view angle  $\gamma(p)$  of the  $i$ th edge  $v$ ,  $\varphi(v)$  at  $p$  is defined as follows (Figure 17) :

$$\gamma_i(p) = \Phi(\Psi(p, \varphi(v_i)) - \Psi(p, v_i)) \quad (\text{Eq 6.9})$$

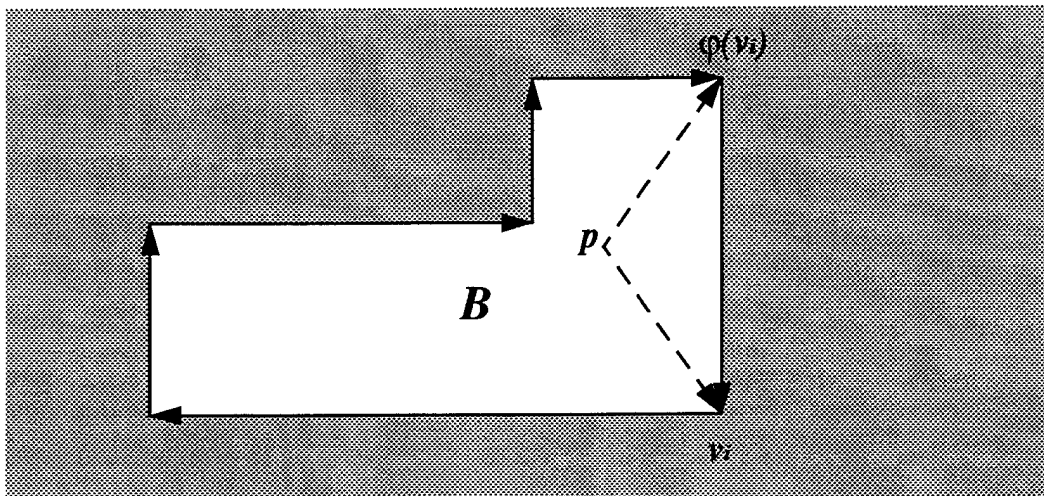

**Figure 17: View Angle at point  $p$**


The sum of the  $n$  view angles in  $B$  is defined as

$$\Gamma_B(p) = \sum_{i=1}^n \gamma_i(p) \quad (\text{Eq 6.10})$$

In the inverted world, if  $\Gamma_B(p) = -2\pi$ , the point  $p$  is in  $Free(W)$ , otherwise, it's not in  $Free(W)$  [Kana].

**c. Collision Test of Vehicle**

So far, the vehicle in the motion planning has been dealt as if one point. But it is not enough to test if the vehicle collides the walls. In real world, the vehicle has a rigid body with size such as width and length. There might be a situation while one corner of the vehicle is in the free space, the other corner could collide the wall. This behavior can not be accepted. We need to know how to test collision of each corner of the vehicle at every step of the motion planning.

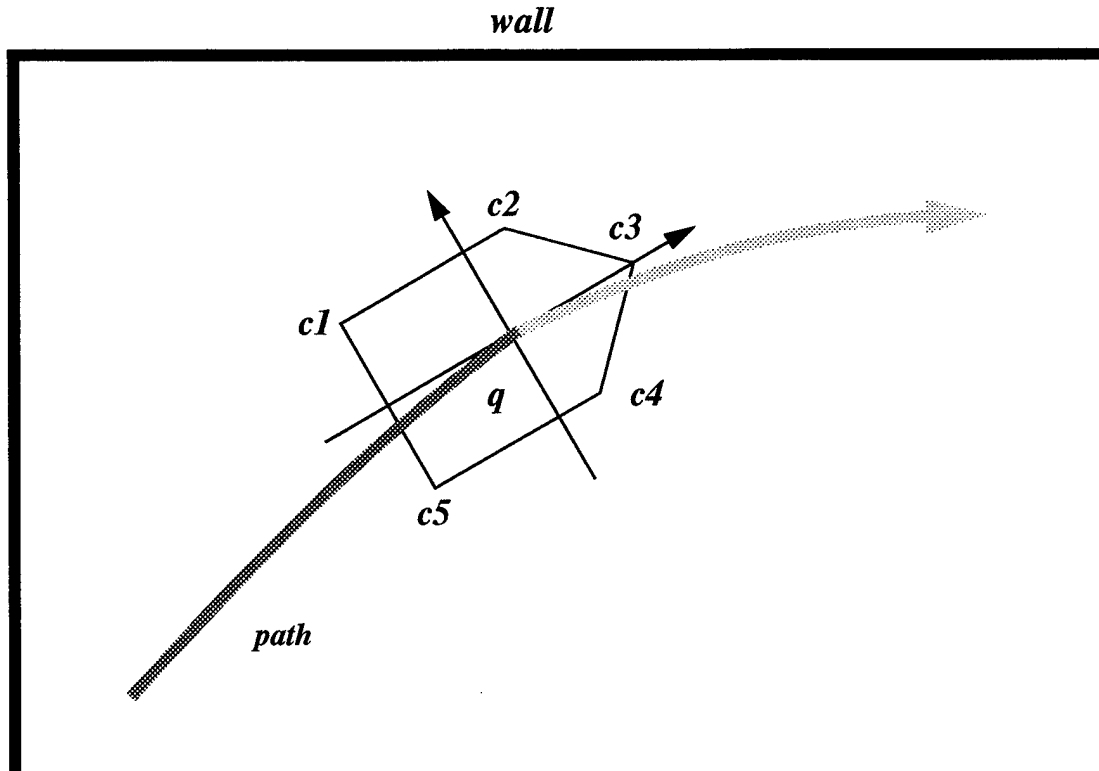

**Figure 18: Collision test of vehicle**



As shown in the Figure 18, we know two important informations such that the configuration of the center of the vehicle  $q$  which is on the motion planning path, and the local coordinates of vehicle's corners such as  $c1, c2, c3, c4, c5$ . With the information, we can get each corner's configuration as follows:

$$q1 = q \circ c1,$$

$$q2 = q \circ c2,$$

$$q3 = q \circ c3,$$

$$q4 = q \circ c4,$$

$$q5 = q \circ c5$$

Instead of testing center of the vehicle, the collision test will be doing at each corner.

### C. EXPERIMENTAL RESULT

Figure 19 shows the result in which the vehicle located at a configuration  $q_s = ((50.0, 100.0), -3\pi/4, 0.0)$  finds a path to converge to the exit configuration  $q_e = ((175.0, 679.704), \pi/2, 0.0)$  avoiding a collision of the walls. The default smoothness  $\sigma$  is 80. The vehicle used in the experiment has the size: width = 50cm, length = 60cm.

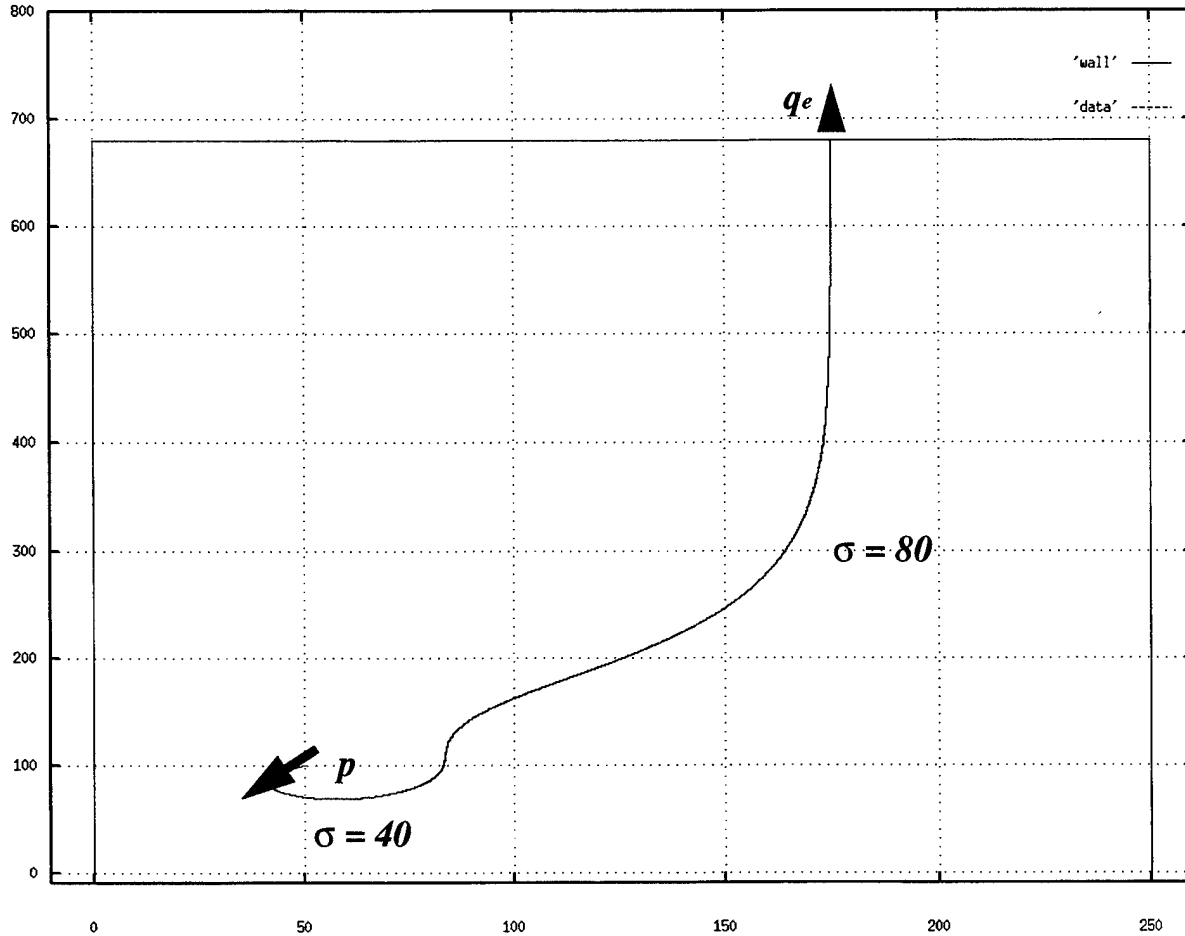


Figure 19: The result the vehicle finds a path



## APPENDIX

### A. C PROGRAM FOR SMOOTH ROTATION

```

/*****
Function : rotateRule()
Purpose  : updates the commanded velocity to rotate the robot
Parameters: VELOCITY actual, commanded
Returns  : The required linear velocity, rotational velocity
Called by :
Calls    : limit()
*****/

static VELOCITY
rotateRule(VELOCITY actual, VELOCITY commanded)
{
    double k = 0.5;
    static double goalTheta;
    static int noGoalTheta = TRUE;
    static double rotVel = 0.0;
    double rotAcc = 0.0;

    if (noGoalTheta) {
        /* set the goal of rotation */
        goalTheta = vehicle.Theta + currentPath.config.Theta;
        noGoalTheta = FALSE;
    }

    commanded.Linear = 0.0;

    if (fabs(vehicle.Theta - goalTheta) >= 0.005) {
        rotAcc = -2 * k * rotVel - k * k *
            (vehicle.Theta - goalTheta);
        rotAcc = limit(rotAcc, DEFAULT_ROT_ACC);
        rotVel = rotVel + rotAcc * MOTION_CONTROL_CYCLE;
        rotVel = limit(rotVel, DEFAULT_GOAL_VEL_ROT);
        commanded.Rotational = rotVel;
    }
    else { /* the rotation is completed */
        currentPath.pathType.mode = STOPMODE;
        commanded.Rotational = 0.0;
        noGoalTheta = TRUE;
        rotVel = 0.0;
    }

    return commanded;
}

```

```

/*****
Function : limit
Purpose  : This function is used by rotate function
           to limit rotational speed of the robot
Parameters : double y, l
Returns   : double y, l
Called by : rotateRule()
Calls    : None
*****/

```

```

double
limit(double y, double l)
{
    if (y > l) y = l;
    else if (y < -l) y = -l;

    return y;
}

```

## B. C PROGRAM FOR SYMMETRIC MOTION PLANNING

```
/******  
Module Name: Header file  
Purpose: define variables  
Parameters:  
Returns:  
Called by:  
Calls:  
*****/  
  
#include <iostream.h>  
#include <math.h>  
  
#define PI 3.1415926  
  
typedef struct {  
    double X;  
    double Y;  
}POINT;  
  
typedef struct {  
    POINT Posit;  
    double Theta;  
    double Kappa;  
}CONFIGURATION;  
  
CONFIGURATION symConfig[100000];  
  
/* smoothness for virtual and real robot */  
double sigma = 20;  
double sigma2 = 1;  
  
/* different delta s is used in calculatedVirtualRobotPath() */  
double deltaS = 0.1;
```

```

/* constant for steering function used in simulation */
double k = 1.0 / sigma;
double a = 3 * k;
double b = 3 * k * k;
double c = k * k * k;

/* constant for steering function used in real robot */
double kk = 1.0 / sigma2;
double aa = 3 * kk;
double bb = 3 * kk * kk;
double cc = kk * kk * kk;

/* define functions used in the program */
CONFIGURATION moveRealRobot(CONFIGURATION q);
CONFIGURATION calculateVirtualRobotPath(CONFIGURATION q, CONFIGURATION L);
CONFIGURATION moveRobotOnSimulatedPath(CONFIGURATION q, int index);
double computeSymmetricPathKappa(CONFIGURATION q, int i);
double getKappa(CONFIGURATION q, CONFIGURATION L);

/* library functions */
CONFIGURATION computeQstar(CONFIGURATION q1, CONFIGURATION q2);
CONFIGURATION composite(CONFIGURATION q1, CONFIGURATION q2);
CONFIGURATION circ(double deltaS, double theta);
double norm(double angle);

```

```

/*****
Module Name: main function
Purpose: for symmetric motion
Parameters:
Returns:
Called by:
Calls:
*****/

```

```

main()
{
    CONFIGURATION q, L, qstar;
    static VirtualRobotMoving = 1;
    static RealRobotMoving = 0;
    static int initialSetting = 1;
    static int index = 0;
    static int i, LargestIndex = 0;

    /* robot's current configuration */
    q.Posit.X = vehicle.Posit.X, q.Posit.Y = vehicle.Posit.Y,
    q.Theta = vehicle.Theta, q.Kappa = vehicle.Kappa;

    if (initialSetting) {
        /* robot's goal configuration */
        L.Posit.X = path.Posit.X, L.Posit.Y = path.Posit.Y,
        L.Theta = path.Theta + PI, L.Kappa = -path.Kappa;
        initialSetting = 0;
    }

    /* store the goal configuration to array indexed zero */
    symConfig[index].Posit.X = L.Posit.X;
    symConfig[index].Posit.Y = L.Posit.Y;
    symConfig[index].Theta = L.Theta;
    symConfig[index].Kappa = L.Kappa;

    /* 1st part
    move real robot while simulating virtual robot */

    while (VirtualRobotMoving) {

        q = moveRealRobot(q); /* move real robot */

        /* compute new configuration path on which virtual robot moves,
        so the virtual robot L tracks the line defined by
        configuration q */
        L = calculateVirtualRobotPath(L, q);
    }
}

```



```

/* store new simulated configuration to array */
index++;
symConfig[index].Posit.X = L.Posit.X;
symConfig[index].Posit.Y = L.Posit.Y;
symConfig[index].Theta = L.Theta - PI;
symConfig[index].Kappa = -L.Kappa;

/* test xstar if the real robot passes some point
   where the real robot meets the virtual robot */

qstar = computeQstar(symConfig[index], q);
if (qstar.Posit.X <= 0.0) {
    VirtualRobotMoving = 0;
    RealRobotMoving = 1;
}
}

/* 2nd part
   make real robot track the simulated path until the index is 0 */

while(RealRobotMoving) {
    if (index >= 0) {

        /* test xstar if the robot passes local target configuration
           on simulated path */

        qstar = computeQstar(symConfig[index], q);

        if (qstar.Posit.X >= 0.0) {
            q = moveRobotOnSimulatedPath(q, index);
        }
        else index--;
    }
    else {
        LEDon(4);
        currentPath.pathType.mode = STOPMODE;
        commanded.Linear = 0.0;
        commanded.Rotational = 0.0;
        initialSetting = 1;
    }
}
}

```

/\*\*\*\*\*\*

Module Name: moveRealRobot function

Purpose: move real robot step forward

Parameters: q

Returns: q

Called by: main

Calls: circ(), composite()

\*\*\*\*\*/

CONFIGURATION

moveRealRobot(CONFIGURATION q)

```
{
    CONFIGURATION deltaQ;
    double dtheta;

    dtheta = 0.0;
    deltaQ = circ(deltaS, dtheta);
    q = composite(q, deltaQ);
    q.kappa = 0.0;

    return q;
}
```

```

/*****
Module Name: calculateVirtualRobotPath function
Purpose: track the virtual robot to the reference line
Parameters: q, L
Returns: q
Called by: main
Calls: getKappa(), circ(), composite()
*****/

```

#### CONFIGURATION

```

calculateVirtualRobotPath(CONFIGURATION q, CONFIGURATION L)
{
    CONFIGURATION deltaQ;
    double dkappa;
    double theta;
    double DifferentDeltaS = 0.2;

    L.theta = L.theta + PI;

    dkappa = q.Kappa + getKappa(q, L) * DifferentDeltaS;
    theta = DifferentDeltaS * dkappa;
    deltaQ = circ(DifferentDeltaS, theta);
    q = composite(q, deltaQ);
    q.Kappa = dkappa;

    return q;
}

```

```

/*****
Module Name: moveRobotOnsimulatedPath function
Purpose: track the real robot on simulated path
Parameters: q, i
Returns: q
Called by: main
Calls: computeSymmetricPathKappa(), circ(0, composite())
*****/

```

#### CONFIGURATION

```

moveRobotOnSimulatedPath(CONFIGURATION q, int index)
{
    CONFIGURATION deltaQ;
    double dkappa, dtheta;

    dkappa = q.Kappa + computeSymmetricPathKappa(q, index) * deltaS;
    dtheta = deltaS * dkappa;
    deltaQ = circ(deltaS, dtheta);
    q = composite(q, deltaQ);
    q.kappa = dkappa;

    return q;
}

```

```

/*****
Module Name: computeSymmetricPathKappa function
Purpose: compute kappa for real robot on simulated path
Parameters: q, i
Returns: kappa
Called by: moveRobotOnSimulatedPath()
Calls: computeQstar()
*****/

double
computeSymmetricPathKappa(CONFIGURATION q, int i)
{
    CONFIGURATION qstar;
    double deltaKappa, deltaTheta, deltaD;

    qstar = computeQstar(q, symConfig[i]);

    deltaKappa = q.Kappa - symConfig[i].Kappa;
    deltaTheta = q.Theta - symConfig[i].Theta;
    deltaD = qstar.Posit.Y;

    return -(aa * deltaKappa + bb * norm(deltaTheta) + cc * deltaD);
}

```

```

/*****
Module Name: getKappa function
Purpose: compute kappa for virtual robot
Parameters: q, L
Returns: kappa
Called by: main
Calls:
*****/

```

```

double
getKappa(CONFIGURATION q, CONFIGURATION L)
{
    double deltaD;

    deltaD = -(q.Posit.X - L.Posit.X) * sin(L.Theta) +
              (q.Posit.Y - L.Posit.Y) * cos(L.Theta);

    return -(a * q.Kappa + b * (q.Theta - L.Theta) + c * deltaD);
}

```

### C. C PROGRAM FOR INITIAL MOTION PLANNING

```

/*****
Module Name: Header file
Purpose: define variables
Parameters:
Returns:
Called by:
Calls:
*****/

#include <iostream.h>
#include <math.h>

#define PI 3.1415926
#define initialSigma 20
#define ABS(x) ((x < 0.0) ? -x : x)

typedef struct {
    double X;
    double Y;
}POINT;

typedef struct {
    POINT Posit;
    double Theta;
    double Kappa;
}CONFIGURATION;

/* define robot size */
POINT corner[4];
CONFIGURATION robotCorner[4];
CONFIGURATION foreRunner[1000000];

double sigma, k, a, b, c;
```

```

/* define functions used in program */
CONFIGURATION determineDirectionOfMotion(qs, qe);
void getConstantsforForerunner(double sigma);
CONFIGURATION runForerunner(CONFIGURATION q, CONFIGURATION qe);
double getKappa(CONFIGURATION q, CONFIGURATION L);
int checkIfcollide(CONFIGURATION q);
double calculateAngle(CONFIGURATION q, int i, int j);
int checkIfQparallelQE(CONFIGURATION q1, CONFIGURATION q2);
int checkIfQequalsQE(CONFIGURATION q);

/* library functions */
CONFIGURATION computeQstar(CONFIGURATION q1, CONFIGURATION q2);
CONFIGURATION composite(CONFIGURATION q1, CONFIGURATION q2);
CONFIGURATION circ(double deltaS, double theta);
double norm(double angle);

```



```

*****
Module Name: main function
Purpose: for initial motion
Parameters:
Returns:
Called by:
Calls:
*****/

```

```

main()
{
    CONFIGURATION q, qs, qe, qd, qstar;
    int foreRunnerMoving = 1;
    int index = 0, midPoint;
    int i;
    double firstSigma, dinit;
    sigma = initialSigma;
    FILE *stream;

    /* for printing simulated path */
    stream = fopen("data", "wt");
    if(stream == NULL) fputs("File not found!\n", stderr), exit(1);

    /* robot's size */
    robotCorner[0].Posit.X = -25.0, robotCorner[0].Posit.Y = 30.0;
    robotCorner[1].Posit.X = 25.0, robotCorner[1].Posit.Y = 30.0;
    robotCorner[2].Posit.X = 25.0, robotCorner[2].Posit.Y = -30.0;
    robotCorner[3].Posit.X = -25.0, robotCorner[3].Posit.Y = -30.0;

    /* robot's initial and goal configuration */
    qs.Posit.X = 50.0, qs.Posit.Y = 100.0, qs.Theta = -3 * PI / 4.0, qs.Kappa = 0.0;
    qe.Posit.X = 200.0, qe.Posit.Y = 700.00, qe.Theta = PI / 2.0, qe.Kappa = 0.0;

    /* region where robot starts moving */
    corner[0].X = 0.0, corner[0].Y = 0.0;
    corner[1].X = 0.0, corner[1].Y = 700.00;
    corner[2].X = 200.00, corner[2].Y = 700.00;
    corner[3].X = 200.00, corner[3].Y = 0.0;

    qstar = computeQstar(qs, qe);
    dinit = qstar.Posit.Y;
    qstar.Posit.X = 0.0;

    qd = composite(qe, qstar);
    qd.Theta = qe.Theta;
}

```

```

/* store the initial configuration to array indexed zero */
foreRunner[index].Posit.X = qs.Posit.X;
foreRunner[index].Posit.Y = qs.Posit.Y;
foreRunner[index].Theta = qs.Theta;
foreRunner[index].Kappa = qs.Kappa;

/* set the current configuration to start configuration */
q.Posit.X = qs.Posit.X;
q.Posit.Y = qs.Posit.Y;
q.Theta = qs.Theta;
q.Kappa = qs.Kappa;

/* set constants with sigma */
getConstantsforForerunner(sigma);

while (foreRunnerMoving) {
    q = runForerunner(q, qd);
    index++;

    /* store the new configuration to array */
    foreRunner[index].Posit.X = q.Posit.X;
    foreRunner[index].Posit.Y = q.Posit.Y;
    foreRunner[index].Theta = q.Theta;
    foreRunner[index].Kappa = q.Kappa;

    if (checkIfcollide(q) == 1) {
        sigma = sigma / 2.0;
        if (sigma < 0.095 * dinit) {
            printf("Sorry, no possible path to avoid collision!\n");
            exit(0);
        }
        index = 0;
        q.Posit.X = qs.Posit.X;
        q.Posit.Y = qs.Posit.Y;
        q.Theta = qs.Theta;
        q.Kappa = qs.Kappa;

        getConstantsforForerunner(sigma);
    }

    if (checkIfQparallelQE(q, qd)) {
        firstSigma = sigma;
        midPoint = index;
        foreRunnerMoving = 0;
    }
}

```

```

} /* end of while loop */

foreRunnerMoving = 1;
sigma = initialSigma;

while (foreRunnerMoving) {
    q = runForerunner(q, qe);
    index++;

    /* store the new configuration to array */
    foreRunner[index].Posit.X = q.Posit.X;
    foreRunner[index].Posit.Y = q.Posit.Y;
    foreRunner[index].Theta = q.Theta;
    foreRunner[index].Kappa = q.Kappa;

    qstar = computeQstar(qe, q);

    if (qstar.Posit.X <= 0.0) {
        if (checkIfQequalsQE(qstar))
            foreRunnerMoving = 0;
        else {
            sigma = sigma / 2.0;
            index = midPoint;
            q.Posit.X = foreRunner[index].Posit.X;
            q.Posit.Y = foreRunner[index].Posit.Y;
            q.Theta = foreRunner[index].Theta;
            q.Kappa = foreRunner[index].Kappa;

            getConstantsforForerunner(sigma);
        }
    }
} /* end of while loop */
}

```

\*\*\*\*\*

Module Name: determineDirectionOfMotion function

Purpose: determine the direction of robot moving

Parameters: qs, qe

Returns: qs

Called by: main

Calls: norm

\*\*\*\*\*/

## CONFIGURATION

determineDirectionOfMotion(qs, qe)

```
{
  if (ABS(norm(qs.Theta - qe.Theta)) <= PI / 2.0) {
    if (qs.Theta - qe.Theta > PI / 2.0) qs.Theta = qs.Theta - 2 * PI;
    else if (qs.Theta - qe.Theta < - PI / 2.0) qs.Theta = qs.Theta + 2 * PI;
  }
  else if (ABS(norm(qs.Theta - qe.Theta)) > PI / 2.0) {
    if (qstar.Posit.Y >= 0.0) {
      if (qs.Theta - qe.Theta > 0.0) qs.Theta = qs.Theta - 2 * PI;
      else if (qs.Theta - qe.Theta < - 2 * PI) qs.Theta = qs.Theta + 2 * PI;
    }
    else if (qstar.Posit.Y < 0.0) {
      if (qs.Theta - qe.Theta < 0.0) qs.Theta = qs.Theta + 2 * PI;
      else if (qs.Theta - qe.Theta > 2 * PI) qs.Theta = qs.Theta - 2 * PI;
    }
  }
}

return qs;
}
```

```

*****
Module Name: getConstantsforForerunner function
Purpose: compute constants a, b, c with new smoothness
Parameters: sigma
Returns:
Called by: main
Calls:
*****/

```

```

void
getConstantsforForerunner(double sigma)
{
    /* constant for steering function used in simulation */
    k = 1.0 / sigma;
    a = 3 * k;
    b = 3 * k * k;
    c = k * k * k;
}

```

\*\*\*\*\*

Module Name: runForerunner function

Purpose: simulate the robot with arbitrary sigma

Parameters: q, L

Returns: q

Called by: main

Calls: getKappa(), circ(), composite()

\*\*\*\*\*/

#### CONFIGURATION

runForerunner(CONFIGURATION q, CONFIGURATION L)

```
{
    CONFIGURATION deltaQ;
    double dkappa;
    double theta;
    double deltaS = 0.1;

    dkappa = q.Kappa + getKappa(q, L) * deltaS;
    theta = deltaS * dkappa;
    deltaQ = circ(deltaS, theta);
    q = composite(q, deltaQ);
    q.Kappa = dkappa;

    return q;
}
```

```

/*****
Module Name: getKappa function
Purpose: compute kappa for virtual robot
Parameters: q, L
Returns: kappa
Called by: main
Calls:
*****/

```

```

double
getKappa(CONFIGURATION q, CONFIGURATION L)
{
    double deltaD;

    deltaD = -(q.Posit.X - L.Posit.X) * sin(L.Theta) +
              (q.Posit.Y - L.Posit.Y) * cos(L.Theta);

    return -(a * q.Kappa + b * (q.Theta - L.Theta) + c * deltaD);
}

```

\*\*\*\*\*

Module Name: checkIfcollide function

Purpose: test the robot's colliding of wall

Parameters: q

Returns:

Called by: main

Calls: caculateAngle()

\*\*\*\*\*/

```
int
checkIfcollide(CONFIGURATION q)
{
    int i, j;
    double angle = 0.0;
    CONFIGURATION qCorner[4];

    qCorner[0] = composite(q, robotCorner[0]);
    qCorner[1] = composite(q, robotCorner[1]);
    qCorner[2] = composite(q, robotCorner[2]);
    qCorner[3] = composite(q, robotCorner[3]);

    for (i = 0; i < 4; i++) {
        angle = calculateAngle(qCorner[i], 3, 0);
        for (j = 0; j < 3; j++) {
            angle = angle + calculateAngle(qCorner[i], j, j + 1);
        }

        if (angle > -PI) return 1;
    }

    return 0;
}
```



```

*****
Module Name: calculateAngle function
Purpose: calculate the view angle of robot
Parameters: q, i, j
Returns: angle
Called by: checkIfcollide()
Calls:
*****/

```

```

double
calculateAngle(CONFIGURATION q, int i, int j)
{
    return norm(atan2(corner[j].Y - q.Posit.Y, corner[j].X - q.Posit.X) -
                atan2(corner[i].Y - q.Posit.Y, corner[i].X - q.Posit.X));
}

```

\*\*\*\*\*

Module Name: checkIfQparallelQE function

Purpose: test the robot is parallel to the reference line

Parameters: q1, q2

Returns:

Called by: main

Calls:

\*\*\*\*\*/

```
int
checkIfQparallelQE(CONFIGURATION q1, CONFIGURATION q2)
{
    double dtheta;

    dtheta = q1.Theta - q2.Theta;
    if (dtheta >= -0.1 && dtheta <= 0.1) return 1;

    return 0;
}
```

```

*****
Module Name: checkIfQequalsQE function
Purpose: test the robot gets to the qe
Parameters: q
Returns:
Called by: main
Calls:
*****/

```

```

int
checkIfQequalsQE(CONFIGURATION q)
{
    if (q.Posit.Y >= -0.01 && q.Posit.Y <= 0.01) return 1;

    return 0;
}

```

## D. C LIBRARY FUNCTIONS

```
/******  
Module Name: computeQstar function  
Purpose: calculate the local coordinate between two configurations  
Parameters: q1, q2  
Returns: qstar  
Called by:  
Calls:  
*****/
```

### CONFIGURATION

```
computeQstar(CONFIGURATION q1, CONFIGURATION q2)  
{  
    CONFIGURATION qstar;  
  
    qstar.Posit.X = (q1.Posit.X - q2.Posit.X) *  
        cos(q2.Theta) +  
        (q1.Posit.Y - q2.Posit.Y) *  
        sin(q2.Theta);  
    qstar.Posit.Y = (q1.Posit.Y - q2.Posit.Y) *  
        cos(q2.Theta) -  
        (q1.Posit.X - q2.Posit.X) *  
        sin(q2.Theta);  
    qstar.Theta = q1.Theta - q2.Theta;  
  
    return qstar;  
}
```

```

/*****
Module Name: composite function
Purpose: compose two configurations
Parameters: q1, q2
Returns:
Called by:
Calls:
*****/

```

#### CONFIGURATION

```

composite(CONFIGURATION q1, CONFIGURATION q2)
{
    CONFIGURATION q;

    q.Posit.X = q1.Posit.X + q2.Posit.X * cos(q1.Theta) -
                q2.Posit.Y * sin(q1.Theta);
    q.Posit.Y = q1.Posit.Y + q2.Posit.X * sin(q1.Theta) +
                q2.Posit.Y * cos(q1.Theta);
    q.Theta = q1.Theta + q2.Theta;

    return q;
}

```

/\*\*\*\*\*\*

Module Name: circ function

Purpose: get configuration

Parameters: deltaS, theta

Returns: q

Called by:

Calls:

\*\*\*\*\*/

## CONFIGURATION

circ(double deltaS, double theta)

{

CONFIGURATION q;

q.Posit.X = (1.0 - theta \* theta / 6) \* deltaS;

q.Posit.Y = (1.0 / 2.0 - theta \* theta / 24.0) \* theta \* deltaS;

q.Theta = theta;

return q;

}

```

/*****
Module Name: norm function
Purpose: normalize orientation
Parameters: angle
Returns:
Called by:
Calls:
*****/

```

```

double
norm(double angle)
{
    while ((angle >= PI) || (angle < -PI))
    {
        if (angle >= PI)
            angle -= 2 * PI;
        else
            angle += 2 * PI;
    }
    return angle;
}

```

## LIST OF REFERENCES

- [Chuang] Chien-Liang Chuang, "Layered Motion Planning for Autonomous Vehicles", Ph.D. dissertation, Naval postgraduate School, Monterey, CA, 93943, Sep. 1995.
- [Kana] Yutaka Kanayama, "Introduction to Motion Planning" Lecture notes of the Naval Postgraduate School, Department of Computer Science, Naval Postgraduate School, Monterey, CA, 93943, March 25, 1995.
- [Kana95] Y. Kanayama, J Kovalchik, C. Chuang, F. Kelbe, "Motion Planning for Autonomous Mobile Robots", Proceedings of the Autonomous Vehicles in Mine Countermeasures Symposium, pp. 8.14 - 8.80, Symposium Monterey, CA, April 4 - 7. 1995
- [Kova] J. Kovalchik, "Layered Motion Planning for Autonomous Mobile robots Using a Steering Function", Ph.D. dissertation, Naval Postgraduate School, Monterey CA, July 1995.
- [Lato] Latombe, J., "Robot Motion Planning", Kluwer Academic Publishers, 1991.
- [Loza] Lozano-Perez, T., "Spatial Planning: A Configuration Space Approach", *IEEE Transaction on Computer*, vol C-32, no. 2, pp. 108-119, Feb. 1983.
- [Macp] Macpherson, D. L., "Automated Cartography by An Autonomous Mobile Robot Using Ultrasonic Range Finders", Ph.D. dissertation, Naval Postgraduate School, Monterey, CA, Sept. 1993.
- [Nava] Naval Command, control and Ocean Surveillance Center, Technical Note 1194, Update 1, "Survey of Collision Avoidance and Ranging Sensors for Mobile Robots", Everett, H., and Stitz, E., Dec. 1992.





## INITIAL DISTRIBUTION LIST

- |  |   |
|--|---|
| 1. Defense Technical Information Center<br>Cameron Station<br>Alexandria, VA 22304-6145  | 2 |
| 2. Dudley Knox Library<br>Code 013<br>Naval Postgraduate School<br>Monterey, CA 93943-5101   | 2 |
| 3. Chairman, Code CS<br>Computer Science Department<br>Naval Postgraduate School<br>Monterey, CA 93943                                       | 2 |
| 4. Dr Yutaka Kanayama, Code CS/KA<br>Computer Science Department<br>Naval Postgraduate School<br>Monterey, CA 93943                          | 2 |
| 5. Yun, Seok Jun<br>Seoul Dobong-Gu Dobong-Dong<br>624-121 Na-Dong 101 Ho<br>South Korea, 132-012  | 2 |
| 6. Woodang Library<br>Seoul Nowon-Gu Kong Neung-Dong<br>P.O. Box 77<br>Korea Military Academy<br>South Korea, 139-799                        | 1 |
| 7. Ltc. Park, Bong Suk<br>Chung Nam, Nonsan Kun<br>Duma Myeon, Bunam Ri<br>P.O. Box 4<br>Dept. of Personal Education<br>South Korea, 320-919 | 1 |